


# **PRODUCT MAP** Q3 2016

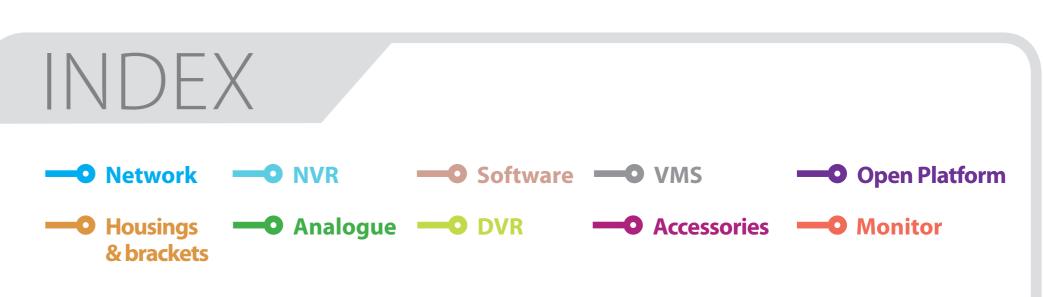

## HANWHA TECHWIN EUROPE

A global leader of video surveillance products bringing the latest technology to the security industry. The innovative product ranges offer you choice to find the best solution for you.

Hanwha Techwin Europe Ltd. hanwha-security.eu

### 🎔 @hanwha-security.eu in HanwhaTechwinEurope





**SNB-8000** 





**SNO-6011R** 

Hanwha





**SNB-5004** 







SNO-6011R/PT

2M 3~8.5mm (2.8x) 120 No

SND-6083

0 IP-66, IK-10

3 ~ 8.5mm 120 No 0.1 Internal



**SNF-8010** 









P-Iris Simple Focus

**SND-6084R** 

2M 3 ~ 8.5mm 120 Yes 0 Internal





SND-L6083R

SNV-6013

2M

2.8mm Fixed 120 No 0.3

IP66, IK10



**SND-6011R** 

SNO-L6083R



2M 3.8mm Fixed 120 Yes 0 IP66



P-Iris lens support Simple Focus -30°C PoE operation



SNO-L5083R 1.3M 3 ~ 10mm N/A



**SND-7084** 





SNO-6084R/AI







**SNF-8010VM** 



Lens	3 ~ 8.5mm	pen	Lens
Dynamic range (dB)	120		Dynamic ran
Day/Night (ICR)	Yes	Platfo	Day/Night (IC)
Min illumination (Lux)	0	e.	Min illumina
Environmental	Internal	3	Environment
Special features			Special fea
P-Iris Simple Focus			P-Iris Simple Focus

solution	2M	Resolution	2M
ns	3 ~ 10mm	▶Lens	3.8mm Fixed
namic range (dB)	N/A	Dynamic range (dB)	120
y/Night (ICR)	Yes	Day/Night (ICR)	Yes
n illumination (Lux)	0	Min illumination (Lux	() O
vironmental	Internal	Environmental	Internal
ecial features		Special features	
way View			

Resolution	2M	Resolution	1.3M
▶ Lens	3.6mm	▶ Lens	3 ~ 8.5mm
Dynamic range (dB)	N/A	Dynamic range (dB)	130
Day/Night (ICR)	Yes	Day/Night (ICR)	Yes
Min illumination (Lux)	0	Min illumination (Lux)	0
Environmental	Internal	Environmental	Internal
Special features		Special features	
Hallway View		P-Iris Simple Focus	

SNV-5084

1.3M

3.6mm 120 Yes

0 IK-10, IP-66

3 ~ 8.5mm 130 Yes 0.01 IP66, IK10

resolution	1.21/1	Resolution
▶ Lens	3 ~ 10mm	Lens
Dynamic range (dB)	N/A	Dynamic range (dB)
Day/Night (ICR)	Yes	Day/Night (ICR)
Min illumination (Lux)	0	Min illumination (Lux)
Environmental	Internal	Environmental
Special features		Special features
Hallway View		P-Iris Simple Focus

1.3M

3M .	<u>0</u> ]	▶ Re	solution	2M 🗳	5
~ 8.5mm	ĕ	▶Le	ns	3 ~ 8.5mm 120 Yes 0.01	
120	P	▶ Dy	namic range (dB)	120	
Yes	ati	Da	y/Night (ICR)	Yes	
0.01	Platform	▶ Mi	in illumination (Lux)	0.01	5
Internal	в	► En	vironmental	Internal	3
		Sp	ecial features		
		P-Ir Sim	is Iple Focus		

2M		Resolution	1.3M	-
3.6mm		▶ Lens	3 ~ 8.5mm	
N/A		Dynamic range (dB)	130	
No		Day/Night (ICR)	Yes	
0.15		Min illumination (Lux)	0.005	1
Internal		Environmental	Internal	
		Special features		
		P-Iris lens support Simple Focus		
	J			





SNV-6084

2M

4M

3.6mm 120 Yes 0

Internal

3 ~ 8.5mm 120 Yes 0.01 IP66, IK10

Spo Hall



SNV-6012M

Transport certified with M12 connector -30°C PoE operation

**QNV-6010R** 

SAMSUNG

2M

3mm Fixed 120 No 0.3

IP66, IK10

P-Iris Simple Focus

-40°C operation PoE heater

**QNV-6020R** 

SAMSUNG



SNP-6320RH

00

Auto tracking 150m IR focus in complete darkness

**QNV-6030R** 

SAMSUNG

-50°C operation

4.4 ~ 140.8mm (32x) (dB) 120 () Yes

0

6mm 120 Yes

0 IK-10, IP-66

IP66, IK10



SNP-6230RH

 $\sim$ 

Auto tracking 150m IR focus in complete darkness

**QNO-6010R** 

-50°C operation

4.4 ~ 101.2mm (23x) (dB) 120 ) Yes

0

IP66, IK10

Z



SNP-L6233RH

00



**SNP-6320H** 

2M



SNP-6321H

4.44 ~ 142.6mm (32x) (dB) 120 Yes

0.03 IP66, IK10

Hallway View



SNP-5430H

1.3M

0.01

2M

Yes

IP66, IK10

3.5 ~ 150.5mm (43x) (dB) 120 Yes



3 ~ 8.5mm 120 Yes 0.01 IP66, IK10

P-Iris Simple Focus -40°C operation PoE heater

P-Iris Simple Focus -40°C operation PoE heater









Compact and Discrete -30°C PoE operation

















**QNV-7030R** 

4M

6mm 120 Yes

0

IK-10, IP-66

0

IK-10, IP-66



-50°C operation -30°C PoE+ operation



SNP-5321H

1.3M

0.03 IP66, IK10

4.44 ~ 142.6mm (32x) 120

-50°C operation -30°C PoE+ operation



SNP-L6233H

4.4 ~ 101.2mm (23x)

100

0.03

IP66, IK10



Auto Tracking -50°C operation -30°C PoE+ operation







SNP-6321 Network WiseNet	SNP-L6233 WISENET LIE	SNP-5430 WISENET II	SNP-5321 Network Wisever	SNP-L5233	SNP-3120VH	SNP-3120	SRN-16735	SRN-8735		SRN-4000	SRN-1000
Resolution 2M S	► Resolution 2M	▶ Resolution 1.3M 응	► Resolution 1.3M	► Resolution 1.3M	► Resolution 4CIF	▶ Resolution 4CIF	► Channels 16	► Channels 8	► Channels 4	► Channels 64	► Channels 64
Lens 4.44 ~ 142.6mm (32x)	▶ Lens 4.4 ~ 101.2mm	Lens 3.5 ~ 150.5mm (43x)	Lens 4.44 ~ 142.6mm (32x)	▶ Lens 4.4 ~ 101.2mm (23x)	Lens 3.69 ~ 44.32mm (12x)	Lens 3.69 ~ 44.32mm (12x)	► PoE channels 16	► PoE channels 8	► PoE channels 4	► PoE channels 0	► PoE channels 0
Dynamic range (dB) 120	Dynamic range (dB) 100	Dynamic range (dB) 120	Dynamic range (dB) 120	Dynamic range (dB) 100	Dynamic range (dB) 52	Dynamic range (dB) 52	Recording Performance Mbps 80	Recording Performance Mbps 64	Recording Performance Mbps 32	Recording Performance Mbps 400	Recording Performance Mbps 100
Day/Night (ICR) Yes	Day/Night (ICR) Yes	► Day/Night (ICR) Yes	Day/Night (ICR) Yes	Day/Night (ICR) Yes	► Day/Night (ICR) Yes	Day/Night (ICR) Yes	▶ Internal HDD 4	▶ Internal HDD 2	▶ Internal HDD 1	▶ Internal HDD 12	▶ Internal HDD 8
Min illumination (Lux) 0.03	Min illumination 0.03	▶ Min illumination (Lux) 0.01 음	Min illumination (Lux) 0.03	Min illumination 0.01	Min illumination (Lux) 0.07	Min illumination (Lux) 0.07	► RAID N/A	► RAID N/A	RAID N/A	RAID 5/6	► RAID 5
Environmental Internal	► Environmental IP66, IK10	Environmental Internal	▶ Environmental Internal	Environmental IP66, IK10	► Environmental IP66, IK10	► Environmental Internal	DVD-RW N/A	▶ DVD-RW N/A	DVD-RW N/A	► DVD-RW N/A	► DVD-RW N/A
Special features	Special features	Special features	Special features	Special features	Special features	Special features	Special features	Special features	Special features	Special features	Special features
		Auto Tracking			-50°C operation		PoE+ HDMI/VGA local monitor Cold swap, no tool, HDD bays	PoE+ HDMI/VGA local monitor	PoE+ HDMI/VGA local monitor	Dual redundant power supplies, HDMI/VGA local monitor, iSCSI storage supported, Hot swap HDD	iSCSI storage supported

SRM-87	72 N	── XRN-201	0 NY	← × × × × × × × × × × × × × × × × × × ×	
					**
▶ Channels	8	Channels:	32	Channels:	32
▶ PoE channels	8	PoE Channels:	N/A	PoE Channels:	N/A
▶ Recording Performance Mbps	64	Recording Performance Mbps:	256	Recording Performance Mbps:	256
▶ Internal HDD	1	Internal HDD:	8	Internal HDD:	8
▶ RAID	N/A	RAID:	N/A	RAID:	5
► DVD-RW	N/A	DVD-RW:	N/A	DVD-RW:	N/A
Special features		Special features		Special features	
Public Transport Certified, GPS, N sensor, Plug & Pl <b>ay camera conne</b>					

			117777
Channels:	16	Channels:	16
	N/A 80	PoE Channels:	16
Recording Performance Mbps: Internal HDD:	80 4	<ul> <li>Recording Performance MI</li> <li>Internal HDD:</li> </ul>	bps: 80 4
	A/N	RAID:	N/A
	N/A	DVD-RW:	N/A
pecial features		Special features	

6	
$\vdash$	─• SSM
	(Smart Security Manager) Available as Professional or Enterprise
•	Efficient multi-site, multi-client
	configuration & management software.
	A central system for live monitoring
	cameras in split-screen mode. Multiple
	layouts enable you to use the advanced
	event monitoring, search & playback
	features in the way that best supports
	your needs.

SSM-RS30	SSM-RS20
Recording software fully integrated with Smart Security Manager. SSM-RS30 records up to 72 channels with high performance recording, at up to 400 Mbps. Software includes multiple disk allocation and distribution for stable recording.	<ul> <li>Recording software fully integrated with Smart Security Manager. SSM-RS20 records up to 128 channels with high performance recording, at up to 400 Mbps. Software includes multiple disk allocation and distribution for stable recording.</li> </ul>



—∘ SSM Mobile 🛔	SmartViewer
SSM Mobile	
A mobile viewer for local or remote	Easy central management software

ntral management software providing live monitoring of up to 36 cameras in split screen mode. Search & playback functionality allows you to search based on date, event or device including snapshot, print and digital zoom functions.


iPOLiS mobile app lets you view live video, control pan/tilt/zoom functions, search & playback anywhere with your smartphone. iPOLiS mobile is designed specifically for Samsung DVR, NVR, IP cameras and encoders. Compatible with iOS and Android devices.

• iPOLiS mobile

──• VMS	−−° Exacq Mg	−−° Genetec Mg	- Milestone	→ Mirasys Mg	OnSee SeeTec
Hanwha Techwin's partnership with VMS partners has previously offered leading central management software and reduced surveillance infrastructure requirements. With the launch of Open Platform, VMS providers are now working with Hanwha Techwin and Application partners to make specialist analytics easily accessible.	<ul> <li>A primary VMS manufacturer for video surveillance. Exacq is renown for its interoperability with hybrid and IP camera servers or commercial off-the- shelf servers. Full configuration of camera functionality across multiple servers via the single interface provides faster connectivity.</li> </ul>	<ul> <li>As a global innovator, Genetec serves enterprise and government organisations via its network of resellers, integrators and consultants in over 80 countries. Innovation is at the forefront of the business, helping to develop open software, hardware and cloud services.</li> </ul>	With over 100,000 installations worldwide, Milestone provides an easy- to-use, powerful VMS. Compatible with a range of IP security devices and systems such as access control, RFID and video analytics. Milestone is the world's leading provider of open IP surveillance software.	MIRASYS () Mirasys surveillance systems are used for loss prevention, perimeter protection, building management and operational efficiency in over 40 countries. Supporting more than 50,000 customers with IP and analogue surveillance systems, Mirasys is a key VMS supplier.	SeeTec's vertical applications support business processes and make hidden potential accessible. Additional extension and interface options have helped SeeTec's rapid growth in transport, logistics, retail, finance, city and critical surveillance markets.



# **PRODUCT MAP** Q3 2016

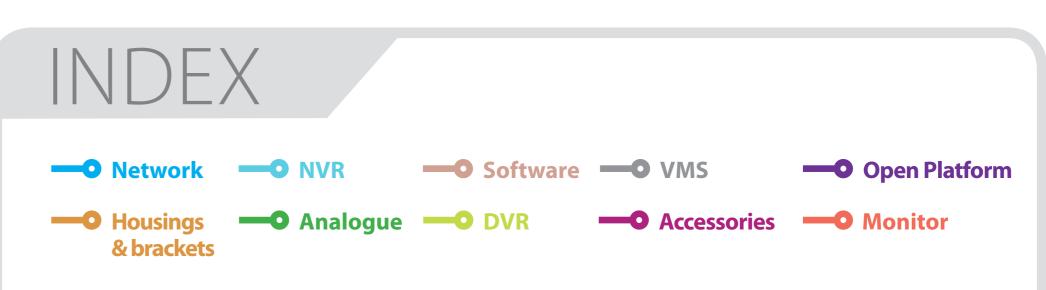

## -• HANWHA TECHWIN EUROPE

A global leader of video surveillance products bringing the latest technology to the security industry. The innovative product ranges offer you choice to find the best solution for you.

Hanwha Techwin Europe Ltd. hanwha-security.eu

#### 🎔 @hanwha-security.eu in HanwhaTechwinEurope



Resolution (TVL) 1000     Lens 2.8~10.5mm     Dynamic Range (dB) 120     Day/Night (ICR) Yes     Min Illumination (Lux) 0.003     Environmental Internal Special features	Resolution (TVL) 1000     Lens 3 ~ 10mm     Dynamic Range (dB) No     Day/Night (ICR) No     Min Illumination (Lux) 0.05     Environmental Internal     Special features	Resolution (TVL) 1000     Lens 3.6mm     Dynamic Range (dB) No     Day/Night (ICR) No     Min Illumination (Lux) 0.09     Environmental Internal     Special features	Resolution (TVL) 1000     Lens 2.8 ~ 10.5mm     Dynamic Range (dB) 120     Day/Night (ICR) Yes     Min Illumination (Lux) 0     Environmental IP66, IK10     Special features     -30°C operation	<ul> <li>Resolution (TVL) 1000</li> <li>Lens 3 ~ 8.5mm</li> <li>Dynamic Range (dB) 120</li> <li>Day/Night (ICR) Yes</li> <li>Min Illumination (Lux) 0.003</li> <li>Environmental IP66, IK10</li> </ul> Special features Simple Focus -30°C operation	<ul> <li>Resolution (TVL) 1000</li> <li>Lens 2.8 ~ 10.5mm</li> <li>Dynamic Range (dB) 120</li> <li>Day/Night (ICR) Yes</li> <li>Min Illumination (Lux) 0.003</li> <li>Environmental IP66, IK10</li> </ul> Special features -30°C operation	Resolution (TVL) 600     Lens 3.5 ~ 129.5mm (37x)     Dynamic Range (dB) No     Day/Night (ICR) Yes     Min Illumination (Lux) 0     Environmental IP66, IK10     Special features     100m IR focus in complete darkness     -50°C operation	Resolution (TVL) 600     Lens 3.2 ~ 138.5mm (43x)     Dynamic Range (dB) 54     Day/Night (ICR) Yes     Min Illumination (Lux) 0.07     Environmental IP66, IK10     Special features -50°C operation	Resolution (TVL) 680     Lens 3.5 ~ 94.5mm (27x)     Dynamic Range (dB) No     Day/Night (ICR) Yes     Min Illumination (Lux) 0.01     Environmental IP66, IK9     Special features -50°C operation	<ul> <li>Resolution (TVL) 600</li> <li>Lens 3.9 ~ 46mm (12x)</li> <li>Dynamic Range (dB) No</li> <li>Day/Night (ICR) Yes</li> <li>Min Illumination (Lux) 0.004</li> <li>Environmental Internal</li> </ul> Special features	Resolution (TVL): 1000     Lens: N/A     Dynamic Range (dB): N/A     Day/Night (ICR): No     Min Illumination (Lux): 0.01     Environment: Internal     Special features	Resolution (TVL):       1000         Lens:       N/A         Dynamic Range (dB):       120         Day/Night (ICR):       Yes         Min Illumination (Lux):       0.001         Environment:       Internal
- SRD-494	SRD-894	→ SRD-1694 B	• SRD-1676D	● SRD-1673D	SRD-1656D	→ SRD-1653D	SRD-1642	SRD-876D	→ SRD-854D	SRD-842	• SRD-476D
<ul> <li>Channels: 4</li> <li>Recording Performance: 1920x1080</li> <li>Max Recording Rate: 100fps</li> <li>Internal HDD: 2</li> <li>External Storage: N/A</li> <li>DVD-RW: N/A</li> </ul> Special features	Channels:       8         Recording Performance:       1920x1080         Max Recording Rate:       200fps         Internal HDD:       4         External Storage:       2         DVD-RW:       N/A         Special features	Channels: 16     Recording Performance: 1920x1080     Max Recording Rate: 100 fps     Internal HDD: 4     External Storage: N/A     DVD-RW: N/A  Special features	Channels 16     Recording Performance 1280 x 576     Max recording Rate 400fps     Internal HDD 4     External storage support 2     DVD-RW Yes  Special features Enhanced Network Bandwidth up to 32Mbps, VGA/HDMI for Full HD monitor output, loop through	Channels 16     Recording Performance 960 x 576     Max recording Rate 400fps     Internal HDD 4     External storage support 2     DVD-RW Yes      Special features Enhanced Network Bandwidth up to 32Mbps, VGA/HDMI for Full HD monitor output	Channels 16     Recording Performance 1280 x 576     Max recording Rate 100fps     Internal HDD 4     External storage support 2     DVD-RW Yes      Special features Enhanced Network Bandwidth up to 32Mbps, VGA/HDMI for Full HD monitor output, loop through	Channels 16     Recording Performance 960 x 576     Max recording Rate 100fps     Internal HDD 4     External storage support 2     DVD-RW Yes      Special features Enhanced Network Bandwidth up to 32Mbps, HDML/VGA Full HD monitor output	Channels 16     Recording Performance 960 x 576     Max recording Rate 400fps     Internal HDD 2     External storage support N/A     DVD-RW N/A  Special features Enhanced Network Bandwidth up to 32Mbps, VGA/HDMI for Full HD monitor output	Channels 8     Recording Performance 1280 x 576     Max recording Rate 200fps     Internal HDD 4     External storage support 2     DVD-RW Yes  Special features Enhanced Network Bandwidth up to 32Mbps, VGA/HDMI for Full HD monitor output, loop through	Channels 8     Recording Performance 960 x 576     Max recording Rate 50fps     Internal HDD 4     External storage support N/A     DVD-RW Yes      Special features Enhanced Network Bandwidth up to 32Mbps, VGA/HDMI for Full HD monitor output	Channels 8     Recording Performance 960 x 576     Max recording Rate 2007ps     Internal HDD 2     External Storage support N/A     DVD-RW N/A  Special features Network Bandwidth up to 16Mbps, VGA/ HDMI for Full HD monitor output	Channels 4     Recording Performance 1280 x 576     Max recording Rate 100fps     Internal HDD 1     External storage support N/A     DVD-RW Yes      Special features Enhanced Network Bandwidth 16Mbps, VGA/ HDMI Full HD monitor output, loop through
• SDC-9441BC	• SDC-9442DC	• SDH-B73020 Analogue HD	• SDH-B73040	SDH-C74040	SMT-4032A	• SMT-1931	SMT-1935	SMT-2233	• SMT-2731 Monitor	SMT-3232A	SMT-1914
Resolution (TVL) 1080P 2M     Lens 4mm     Field Of View H:72.2° / V: 52.9°     Weather Protection IP66     IR Distance 25m (82ft)  Special features Additional camera for kits	Resolution (TVL) 1080P 2M     Lens 4mm     Field Of View H:72.2° /V: 52.9°     Weather Protection PP66     IR Distance 25m (82ft)      Special features     Additional camera for kits	Channels: 4     Cameras: 2     Hard drive: 1TB     Mobile app: Android & iOS     Camera cable: 18m (60ft)      Special features     All in one kit	Channels: 4     Cameras: 4     Cameras: 4     Hard drive: 1TB     Mobile app: Android & iOS     Camera cable: 18m (60ft)      Special features All in one kit	Channels:         8     Cameras:         4     Hard drive:         2TB     Mobile app:     Android & iOS     Camera cable:         18m (60ft)      Special features All in one kit	<ul> <li>Size &amp; format 40"/16:9</li> <li>Maximum resolution 1,920 x 1,080</li> <li>Response time 8ms</li> <li>Contrast ratio 5,000:1</li> <li>Video input VGA, DVI, HDMI, Component</li> </ul> Special features Slim design SBM-3240ST stand available	Size & Format: 19"/16:9 Max Resolution: 1366x768 Response Time: 5ms Contrast Ratio: 1000:1 Video Input: HDMI, VGA, BNC Special features	Size & Format: 19" / 4:3 Max Resolution: 1280x1024 Response Time: 5ms Contrast Ratio: 1000:1 Video Input: HDMI, VGA, BNC Special features	Size & Format: 22"/16:9 Max Resolution: 1920x1080 Response Time: 5ms Contrast Ratio: 1000:1 Video Input: HDMI, VGA, BNC Special features	Size & Format: 27"/ 16:9 Max Resolution: 1920x1080 Response Time: 5ms Contrast Ratio: 1000:1 Video Input: HDMI, VGA, BNC Special features	<ul> <li>Size &amp; format 32"/16:9</li> <li>Maximum resolution 1,920 x 1,080</li> <li>Response time 8ms</li> <li>Contrast ratio 5,000:1</li> <li>Video input VGA, DVI, HDMI, Component</li> <li>Special features</li> <li>Slim design SBM-3240ST stand available</li> </ul>	Size & format     19"/4:3     Maximum resolution     1,280 x 1,024     Response time     Sms     Contrast Ratio     1,000:1     Video input     VGA  Special features
SLA-M2890PN	SLA-M2890DN	SLA-3580DN	SLA-2812DN Accessories	SLA-550DV Accessories	• SPE-400B	• SPE-1600R	• SPE-400	SPE-101 Accessories	© SPE-100	Construction of the second sec	© SPC-2000 Accessories
Resolution       3M         Focal Length       2.8 ~ 9mm         Angle of View       1/2.8"         Iris Type       DC         Max. Aperture Ratio       F1.2         Special features       Only compatible with P-Iris cameras	Resolution       3M         Focal Length       2.8 ~ 9mm         Angle of View       1/2.8"         Iris Type       DC         Max. Aperture Ratio       F1.2	Resolution 4CIF     Focal Length 3.5 ~ 8mm     Angle of View 1/3"     Iris Type DC     Max. Aperture Ratio F 1.0  Special features IR corrected	Resolution 4CIF     Focal Length 2.8 ~ 12mm     Angle of View 1/3"     Iris Type DC     Max. Aperture Ratio F1.3  Special features IR corrected	Resolution 4CIF     Focal Length 5 ~ 50mm     Angle of View 1/3"     Iris Type DC     Max. Aperture Ratio F1.3  Special features Wi-Fi dongle available SEA-W01AC	Channels 4 RS-485 Support Yes Max Resolution 704 x 576 Max Framerate 25fps  Special features Blade for SPE-1600R rack	Channels 16     RS-485 Support Yes     Max Resolution 704 x 576     Max Framerate 25fps     Special features     Rack for up to four SPE-400B	Channels A	Channels 1     R5-485 Support Yes     Max Resolution 704 x 576     Max Framerate 25fps  Special features PoF	Channels 1     RS-485 Support Yes     Max Resolution 704 x 576     Max Framerate 25fps      Special features     PoE, SD memory, Bi-directional audio	Channels 1     Video Out HDMI/VGA/BNC     Resolution 1080p     Display Single, Quad view      Special features Sequence mode for multiple video sources	Interface USB 2.0, DirectX     Joystick Yes     Control Unit No     Compatibility SSM, SmartViewer     Display N/A  Special features
• SPC-7000	• SPC-6000 Accessories	Wi-Fi dongle available SEA-W01AC           •         SPC-2010	Wi-Fi dongle available SEA-W01AC	• SPC-300	• SPC-200	• SPO-100	• SHP-3701H	SHP-3701F	• SHD-3000F1	• SBP-300WM	SBP-300WM1 Housings & E
Interface: Network     Interface: Yes     Control Unit: Yes     Compatibility: IP PTZ, SRN, XRN, SSM     Display:     Special features	Interface RS485/422, TTL Joystick Yes Control Unit Yes Compatibility PTZ, DVR, Matrix Display S' Touchscreen	Interface RS-485/422     Joystick Yes     Compatibility PTZ, DVR     Display 32 character LCD  Special features	Interface       RS-485/422         Joystick       Yes         Ootrol Unit       No         Compatibility       PIZ         Display       32 character LCD	Interface R5-485, Coax Joystick No Control Unit No Compatibility PTZ Display N/A Special features	Interface RS-485 Joystick No Control Unit No Compatibility SCZ cameras Display N/A	Channels 1 Speed 100Mbps Power required Pote Power for camera 6.3 ~ 11.7W Extra cable length +100m Special features	Mount type PTZ Camera Housing     Environmental Outdoor     Material Aluminium, Polycarbonate     Compatibility For Indoor PTZ     (not including SNP-3120/     SCP-3120)  Special features	Mount type PTZ Camera Housing Environmental Indoor Material Polycarbonate Compatibility For Indoor PTZ (not including SNP-3120/ SCP-3120) Special features	Mount type Dome Camera Housing Environmental Indoor/Outdoor Material Polycarbonate Compatibility SCV-6081R, SND-6084R, SND-6084, SND-5084R, SNV-5084, SNV-5084, SNV-6084, SNV-5084R, SNV-50844 SNV-6084, SNV-5084R, SNV-50844 Special features	Mount type Wall Environmental Indoor/Outdoor Material Aluminium + SECC Compatibility All hanging mounts, Outdoor PTZ & SHP-3701H Special features	Mount type Wall Privironmental Indoor/Outdoor Material Aluminium + SECC Compatibility All hanging mounts, Outdoor PTZ & SHP-3701H Special features
					Zermannen ersten ersten Bar	In many metanoide distance and the Dark		Floreb mount boundary	Fluck mount housing		

<b>~~</b> •	SBP-300NB	Hous	── <b>○</b> SBP-300B	Hous	SBP-300LM	Hole	── SBP-300PM	──• SBP-300KM		── SBP-300CM	Hous	── SBP-300HM1	── SBP-301HM2 <b>हू</b>	—• SBP-301HM3 ₽		→ SBP-301HM4	Hous	── SBP-300HM5		── <sup>©</sup> SBP-300HM6	Hous
	0	ings & brackets		ings & brackets		inge & hypekote	Ings & brackets		inge & hyackate		ings & brackets	ings & brackets	ings & brackets	error of the second sec		٢	ings & brackets		o hvorbots	٢	ings & brackets
Mount type     Environmen     Materia     Compatibilit	SBP-300WM1, SBP-300KM, SBP-300PM		Mount type Wall mount adapter     Indoor/ Outdoor     Material Aluminium + SECC     Compatibility SBP-300WM,     SBP-300WM1  Special features		Mount type Parapet Mount     Environmental Indoor/Outdoor     Material Aluminium + SECC     Compatibility All hanging mounts, Outdoor PTZ & SHP-3701H     Special features		Mount type Pole Mount     Environmental Indoor/Outdoor     Material SECC     Compatibility SBP-300WM1,     SBP-300WM, SBP-300B     Special features	Mount type Corner Mount     Environmental Indoor/Outdoor     Material SECC     Compatibility SBP-300WM1,     SBP-300WM, SBP-300B     Special features		Mount type Ceiling Mount Indoor/Outdoor Material Aluminium + SECC Compatibility All hanging mounts, Outdoor PTZ & SHP-3701H Special features		<ul> <li>Mount type Hanging Mount</li> <li>Environmental Indoor/Outdoor</li> <li>Material Aluminium</li> <li>Compatibility SCP-3430/ 2430/3370/2370/2270/3250/ 2250/3120/2330/2120, SNP-6200/ 5200/3371/3302/3120, all Wall Mounts</li> <li>Special features</li> </ul>	Mount type Hanging Mount Environmental Indoor/Outdoor Material Aluminium Compatibility SCD-6080, SCV-5083/ 5080/3082/3081/2081/2081R, SND-7082/6084/5084/6083/500/6084R, SNV-16083R SNV-L5083R, all Wall Mounts Special features	Mount type Hanging Mount Environmental Indoor/Outdoor Material Aluminium Compatibility SCP-3371/2371/2271/ SCV-3080/3082/2080/2080R/2120 SNP-6201/S300 SNV-7082/7080/7080R/ 5080/5080/3120/3082, all Wall Mounts Special features	► N ► E ► N ► C	lount type Fisheye Camera Hanging moun nvironmental Indoor/Outdoo laterial Aluminiu mpatibility SCD-6021/5085/5083R 5083/5080, SNF-7010/7010V/7010V/ SND-L6083R, SND-L5083R, all Wall Mount recial features	oor im BR/ /M	Mount type Hanging Mount     Environmental Indoor/Outdoor     Material Aluminium     Compatibility SNF-8010W/8010,     all Wall Mounts  Special features		Mount type Hanging Mount Environmental Indoor/Outdoor Material Aluminium Compatibility SCV-6081R/S085R/ 5085, SNV-8080R/8080/7084R/7084/ 6084R/S084R/S084R/5084, all Wall Mounts Special features	
IP66		J		J		J			][		J				C		] [		][		J

ncrease network distance with PoE

for +100m@cat5

SBP-300HM7 ₽	SBP-300TM	SBP-300TM1	SBI
ings & brackets	ings & brackets	ings & brackets	
Mount type Hanging Mount	Mount type Wall/Ceiling Tilt Mount	Mount type Wall/Ceiling Tilt Mount	Mount type
Environmental Indoor/Outdoor	Environmental Indoor/Outdoor	Environmental Indoor/Outdoor	Environmental
Material Aluminium	Material Polycarbonate	Material Polycarbonate	Material
Compatibility SNV-6013, SND-L5013, SND-L6012, SND-L6013, SND-L6013R all Wall Mounts	Compatibility SNF-7010/7010V	Compatibility SNF-8010VM/8010	Compatibility SCD-3083/2 SCD-2080R/20 SCD-2080R/20
Special features	Special features	Special features	Special featur

──• SBP-30		── SH	B-4300H	
	OWMO			-95 of the network
Mount type	Wall/Ceiling	Mount type	Fixed Housing	
Environmental	Indoor	Environmental	Indoor/Outdoor	
Material	Polycarbonate	Material	Aluminium	
Compatibility SCD-3083/3082E/30 SCD-2080R/2080E/208 SCD-2020R/20		► Compatibility	All Box Cameras	
Special features		Special feature	S	
		-35°C ~ +50°C 24VAC		

Housi	── SHB	-4300H1	Housi	—∘ shi	B-4
Housings & brackets			Housings & brackets		
	Mount type	Fixed Housing		Mount type	
	Environmental	Extreme Weather		Environmental	- 1
	Material	Aluminium		Material	
	▶ Compatibility	All Box Cameras		► Compatibility	
	Special feature			Special feature	
	-50°C ~ +50°C 24VAC			-50°C ~ +50°C 240VAC	

oom camera setup controlle

Housings & brackets	S	TB-4150V
Fixed Housing	Mount type Environmental	Bracket for Box Camera Indoor/Outdoor
Aluminium	Material	Aluminium
All Box Cameras	Compatibility	Box Camera
	Special featu	res

IP66, IK10

° SB	SV-158G	Hous	── SB	F
	0	Housings & brackets		
n <mark>t type</mark> onmental	Vandal Dome Back Box		Mount type     Environmental	Bu
rial	Outdoor Aluminium		<ul> <li>Material</li> </ul>	
atibility	SNV-5084, 6084, 4, 5084R, 6084R, 7084R		Compatibility SCO-2080R, S	C

Flush mount housing

Flush mount housing

SBP-SNO/PM	── SBP	-300HF	Hous
SBP-SNO/PM			Housings & brackets
type Bullet Camera Pole Mount	Mount type	Fibre adaptor	
nmental Outdoor	Environmental	Outdoor	
al Aluminium	Material	Aluminium	
tibility SCO-5083R, SCO-2081R, SCO-2120R, -2080R, SCO-2080, all SNO cameras	► Compatibility	SNP-6320H, SNP-5430H	
l features	Special features		
	ID66		

Housings & brackets	SBP	P-301HF Housings & brackets
	<ul> <li>Mount type</li> <li>Environmental</li> </ul>	Fibre adaptor
	<ul> <li>Material</li> </ul>	Outdoor Aluminium
	► Compatibility	SNP-6321H, SNP-5321H
	Special features	
	IP66	

		SBP-SCP/SN	→ SHB-4200H
sings & brackets	sings & brackets	sings & brackets	
Mount Type: Dome Camera Housing	Mount Type: Dome Camera Housing	Mount Type: Swan Neck Bracket	Mount Type: Fixed Housing
Environment: Indoor/Outdoor     Material: Polycarbonate	Environment: Indoor Material: Polycarbonate	Environment: Indoor/Outdoor Material: Aluminium	Environment: Indoor/Outdoor     Material: Aluminium
Compatibility: SNV-L6083R, SNV-L5083R,	Compatibility: SND-L6083R, SND-L5083R,	Compatibility: All Hanging Mounts,	Compatibility: Box Cameras
SCV-5083, SCV-5083R, SNV-5085	SCD-5080, SCD-5083	Outdoor PTZ & SHP-3701H	(Network/Analogue)
Special features	Special features	Special features	Special features
		IP66, IK10	