

GRIFFON[®]
SECURE STORAGE UNITS



GRIFFON
PREMIUM QUALITY SAFES



SAFES AND
SECURE STORAGE UNITS

 **PARITET-K**[®]
secure storage units

How to choose the safe?

01 Where will you install the safe?



Apartment



Office




Home



Availability of alarm and security

02 What will be kept in the safe?

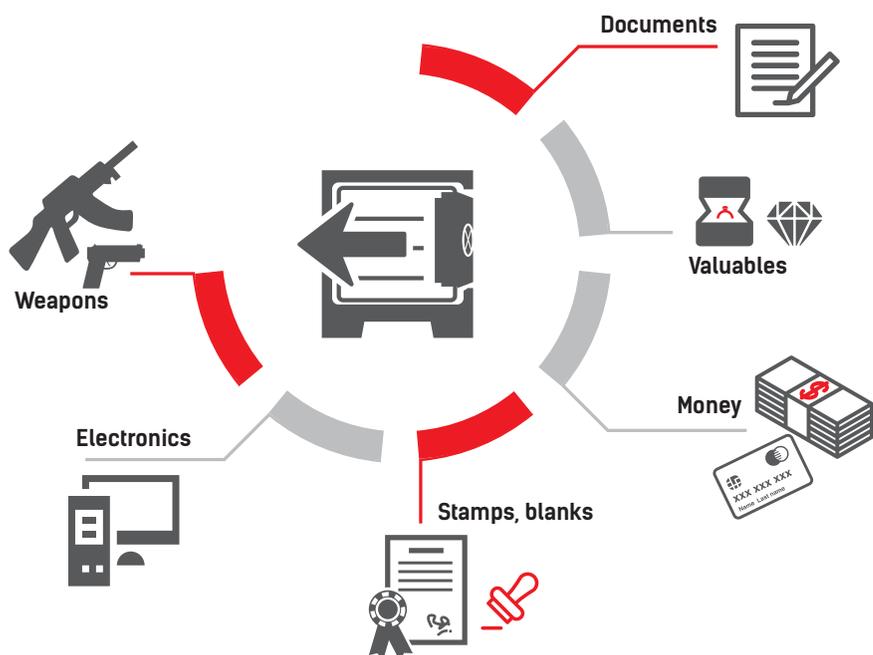

03 What type of protection?



Fire-resistant



Burglar-resistant



Fire- and burglar-resistant

What type of lock?



Key



Electronic code




Mechanical code



Combined

05 What size?

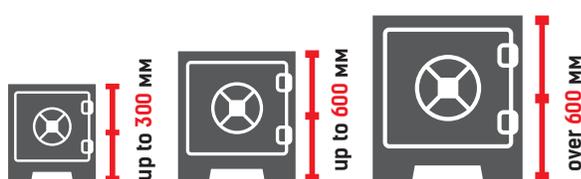


04

Recommendations



Safes up to 1,000 kg is recommended to fix to the floor to prevent removal



It is recommended to buy 2 safes: safe-bait and the main safe. The safe must be properly hidden



Check EN certificate, appropriate nameplate on the door of the safe, guarantee, instructions




Recommended safe price 10% of the value stored in the safe



Remember that real safe can not be with light weight. Burglar-resistant safes with special concrete safely keep your valuables and documents

Safe is being considered as protective equipment which has the following features:

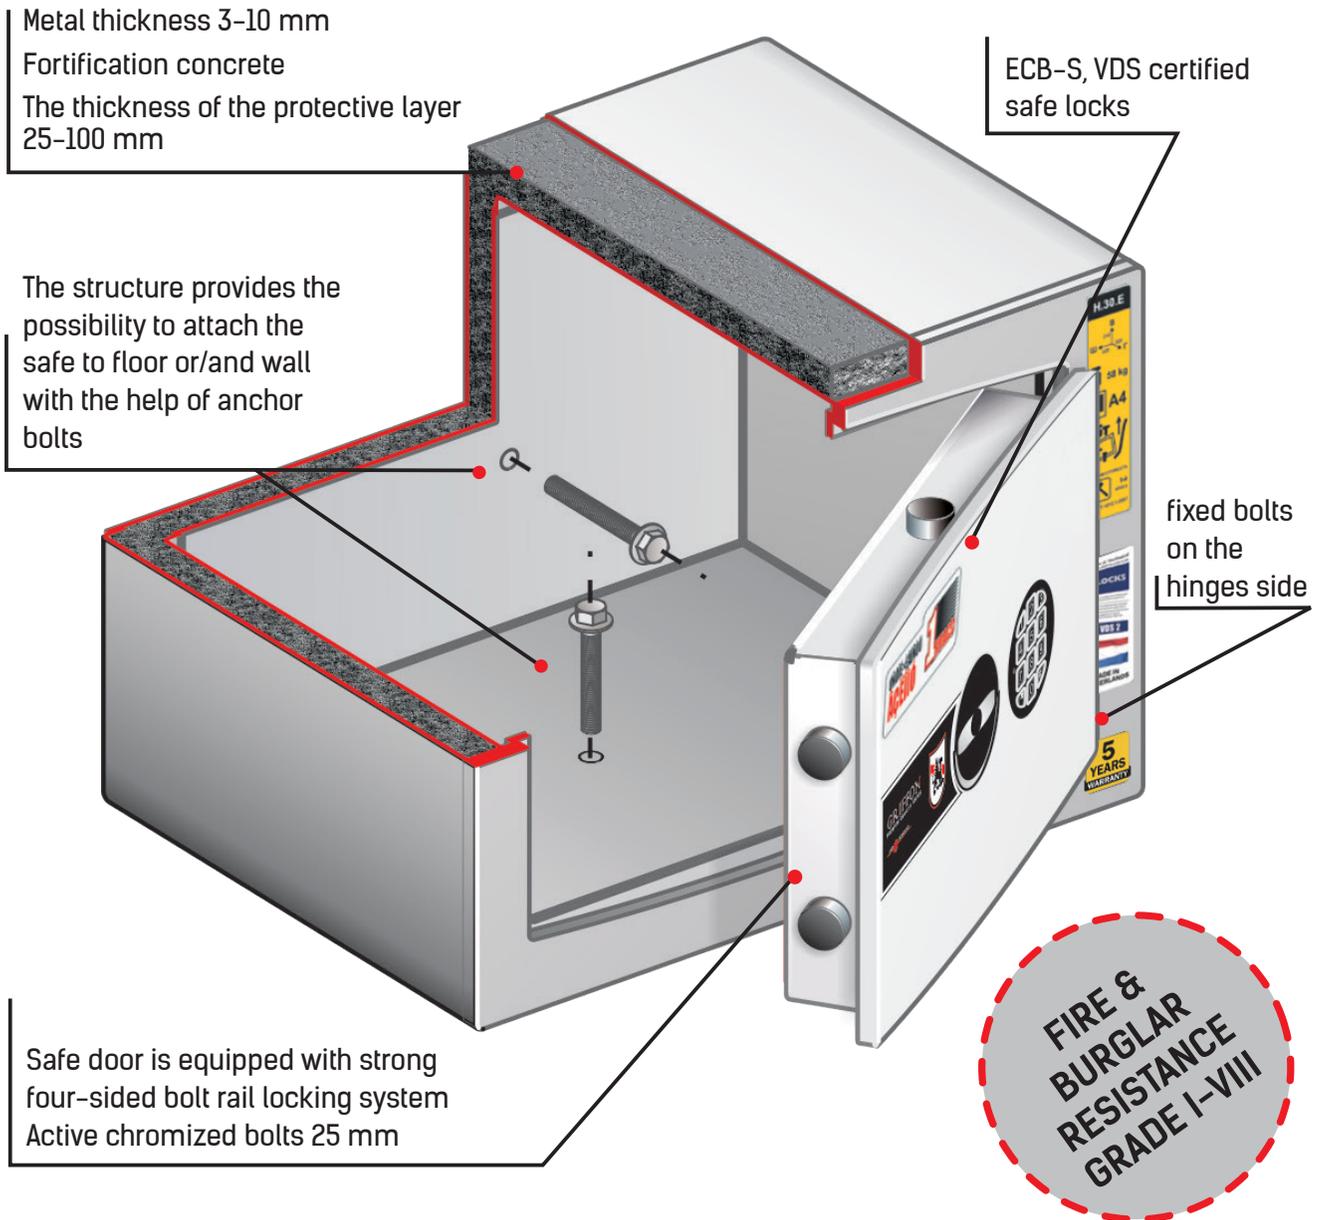

- ☒ Metal case with 3 mm thickness of or double-walled case with special filling
- ☒ Four-sided locking system (active chromized bolts and fixed bolts)
- ☒ ECB-S, VDS certified safe lock (key, electronic code, mechanical code or combined locks)
- ☒ Anchor unit for mounting safe to the floor and/or wall

Burglar resistance and/or fire resistance confirmed by a certificate and a special nameplate on the door inside.

- ☒ Safes are grade II certified as per EN 1143-1
- ☒ Safes meet the requirements for protection level LFS 30 P for fire resistance according to EN 15659
- ☒ Burglar-resistant system of relockers
- ☒ Safe doors are equipped with strong three-sided bolt locking system, 5 active chromized bolts 25 mm by diameter and 3 fixed bolts on the hinges side
- ☒ Additional protection bolt locking system with 3 mm steel screen
- ☒ Additional protection of bolt locking system with 3 mm steel screen plate
- ☒ The protective layer of the case and door with fortification concrete – 55 mm thickness
- ☒ The structure provides the possibility to fix the safe to floor by anchors
- ☒ BASF thermal tape (Germany) along the perimeter of the door to protect from fire
- ☒ Configurations KE, KC with inner decoration
- ☒ Standard color: dark grey, cream
- ☒ Dimensions are specified without standing out parts: lock, handle, hinges
- ☒ Removable shelf

Locking system:

K - Certified safe key lock STUV (Germany) A class

E - Certified safe electronic code lock M-LOCKS (The Netherlands) B class with with delay opening function

C - Certified safe code mechanical lock LaGard (USA) / M-LOCKS (The Netherlands)



CLE II.50.E CREAM



CLE II.68.K.C

Model	External dimensions, mm			Internal dimensions, mm			Weight, kg	Volume, litres	Modification*
	Height	Width	Depth	Height	Width	Depth			
CLE II.50	506	460	480	390	350	312	205	43	K/E/C/KE/KC, S
CLE II.60	606	500	500	490	390	330	261	64	K/KK/KE/KC, S
CLE II.68	686	500	500	570	390	330	288	73	K/E/KE/KC, S, T
CLE II.70	706	600	600	590	490	430	382	124	KK, S
CLE II.90	906	500	500	790	390	330	365	102	K/E/KE/KC, S, T
CLE II.100	1006	600	600	890	490	430	507	188	KK, S
CLE II.120	1206	500	500	1090	390	330	466	140	K/E/KE/KC, S, T
CLE II.130	1306	600	600	1190	490	430	625	251	KK, S
CLE II.150	1506	600	600	1390	490	430	765	293	KKKE/KC, S/S, T

*K - key lock, E - electronic lock, C - mechanical code, T - inner lockable box, S - shelves

- ☒ Safes are grade I certified as per EN 1143-1
- ☒ Safes are certified for protection level LFS 30 P for fire resistance according to EN 15659
- ☒ Burglar-resistant system of relockers
- ☒ Steel tempered plates for protection from drilling and knocking out locks and bolts
- ☒ Safe doors are equipped with strong three-sided bolt locking system, 4-5 active chromized bolts 25 mm by diameter and fixed girth rails on the hinges side
- ☒ BASF thermal tape (Germany) along the perimeter of the door to protect from fire
- ☒ The protective layer of the case and door with special fire- and burglary-resistant concrete- 55 mm thickness
- ☒ Standard color: grey (RAL 7040, RAL 7035)
- ☒ Removable shelf
- ☒ The structure provides the possibility to fix the safe to floor by anchors
- ☒ Removable shelf

Locking system:

K - Certified safe key lock STUV (Germany), A class

E - Certified safe electronic code lock M-LOCKS (The Netherlands), B class with delay opening function

C - Certified safe code mechanical lock LaGard (USA) / M-LOCKS (The Netherlands)



F.30CLI.30.E



F.30CLI.50.C

Model	External dimensions, mm			Internal dimensions, mm			Weight, kg	Volume, litres	Modification*
	Height	Width	Depth	Height	Width	Depth			
F30CL I.30	315	440	440	205	330	290	56	20	K/E/C, S
F30CL I.50	460	440	440	350	330	290	77	33	K/E/C, S
F30CL I.70	670	440	440	560	330	290	96	54	K/E/C, S, T

*K - key lock, E - electronic lock, C - mechanical code, T - inner lockble box, S - shelves

- ☒ Safes are grade 0 certified as per EN 1143-1 with an exception of H.22.K, H.26.E, H.28.E models
- ☒ Metal thickness of the door – 14 mm
- ☒ Inner hinges
- ☒ Safe doors are equipped with strong three-sided bolt locking system with chromized bolts 25 mm by diameter (exception H.22.K, H.26.E, H.28.E)
- ☒ Steel tempered plates for protection from drilling and knocking out locks and bolts
- ☒ The protective layer of the case with fortification concrete – 25 mm thickness
- ☒ The structure provides the possibility to fix the safe to floor or wall by anchors
- ☒ Removable shelf
- ☒ Standard color: grey (RAL 7040, RAL 7035)
- ☒ Inner lockable box



H.50.E

Locking system:

K – Certified safe key lock STUV (Germany), A class

E – Certified safe electronic code lock M-LOCKS (The Netherlands), B class with delay opening function

C – Certified safe code mechanical lock LaGard (USA) / M-LOCKS (The Netherlands)



H.22.K



H.30.K.C

Model	External dimensions, mm			Internal dimensions, mm			Weight, kg	Volume, litres	Modification*
	Height	Width	Depth	Height	Width	Depth			
H.22	220	435	324	173	386	242	44	16	K, S
H.26	260	350	274	213	301	192	37	12	K/E/C, S
H.28	282	350	274	231	301	192	40	13	K/E/C, S
H.30	310	435	324	263	386	242	58	25	K/E/C/KC, S
H.30.T	310	435	324	263	386	242	58	25	K, S, T
H.50	500	435	400	453	386	318	90	56	K/E/C/KC, S
H.65	650	435	400	599	386	318	122	73	K/E/C/KC, S,T

*K – key lock, E – electronic lock, C – mechanical code, T – inner lockable box, S – shelves

BURGLAR-RESISTANT SAFES. SERIES HG

- ☒ Metal thickness of the door – 14 mm
- ☒ Inner hinges
- ☒ Steel tempered plates for protection from drilling and knocking out locks and bolts
- ☒ Safe doors are equipped with strong three-sided bolt locking system with chromized bolts 25 mm by diameter (exception HG.22, HG.26, HG.28)
- ☒ The protective layer of the case with fortification concrete – 25 mm thickness
- ☒ The structure provides the possibility to fix the safe to floor or wall by anchors
- ☒ Inner lockable box
- ☒ Standard color: grey (RAL 7040, RAL 7035)
- ☒ Removable shelf



HG.28.K.E

Locking system:

E – Electronic code lock GRIFFON

KE – Electronic code lock GRIFFON and emergency certified safe key lock STUV (Germany), A class



HG.22.E



HG.65.E

Model	External dimensions, mm			Internal dimensions, mm			Weight, kg	Volume, litres	Modification*
	Height	Width	Depth	Height	Width	Depth			
HG.22	220	435	324	173	386	242	44	16	E, S
HG.26	260	350	274	213	301	192	37	12	E, S
HG.28	282	350	274	231	301	192	40	13	E, S
HG.28.T	282	350	274	231	301	192	47	13	KE, T
HG.30	310	435	324	263	386	242	58	25	E, S
HG.30.T	310	435	324	263	386	242	58	25	KE, T
HG.50	500	435	400	453	386	318	90	56	E, S
HG.50.T	500	435	400	453	386	318	91	56	KE, S, T
HG.65	650	435	400	599	386	318	119	73	E/KE, S, T

*K – key lock, E – electronic lock, T – inner lockable box, S – shelves

FIRE-RESISTANT SAFES. SERIES FS

Protection level
LFS 30 P EN 15659

Security level
S2 EN 14450

- ☒ Safes are certified for protection level LFS 30 P for fire resistance according to EN 15659
- ☒ Safes are certified for security level S2 according to EN 14450
- ☒ Steel tempered plates for protection from drilling and knocking out locks and bolts
- ☒ BASF thermal tape (Germany) along the perimeter of the door
- ☒ The protective layer of the case and door with special fire-resistant material – 43 mm thickness
- ☒ Safe doors are equipped with strong bolt locking system with chromized bolts 25 mm by diameter and fixed bolts on the hinges side
- ☒ Removable shelf
- ☒ The structure provides the possibility to fix the safe to floor by anchors
- ☒ Standard color: grey (RAL 7016), cream (RAL 9001)
- ☒ Inner lockable box

Locking system:

K – Certified safe key lock STUV (Germany), A class

E – Electronic code lock Q1/GRIFFON

C – Certified safe code mechanical lock LaGard (USA) / M-LOCKS (The Netherlands)



FS.30.E



FS.57.E

Model	External dimensions, mm			Internal dimensions, mm			Weight, kg	Volume, litres	Modification*
	Height	Width	Depth	Height	Width	Depth			
FS.30	298	420	362	196	334	220	39	14	K/E/C, S
FS.32	318	445	445	216	359	303	52	23	K/E, S
FS.45	455	445	445	353	359	303	65	38	K/E/KE, S, T
FS.57	560	445	445	458	359	303	75	49	K/E/KE, S, T
FS.70	683	450	455	581	364	308	95	65	K/E/KE, S, T
FS.90	900	500	455	798	412	308	123	101	K/E/KE, S, T
FS.123	1230	640	500	1128	554	353	190	221	K/E/KE, S, T
FS.157	1565	690	500	1463	604	353	250	312	K/E/KE, S, T
FS.180	1790	690	500	1688	604	353	270	360	K/E/KE, S

*K – key lock, E – electronic lock, C – mechanical code, T – inner lockable box, S – shelves



Security level
S1 EN 14450

BURGLAR-RESISTANT GUN SAFES. EUROPEAN SERIES GE

-  ECB-S certified safes for security level S1 according to EN 14450 in Europe
-  Patented burglar-resistant construction „hook-up“
-  Safe doors are equipped with strong three-sided bolt locking system with chromized bolts 25 mm by diameter
-  Steel tempered plates for protection from drilling and knocking out locks and bolts
-  Adjustable rack for optical weapons and removable magnetic rack
-  Inner hinges
-  Metal thickness of the case and the door - 3 mm
-  Adjustable shelves
-  Add on devices on the door: pockets for mags, ammo, ramrod holders, hooks.
-  1-2 inner lockable boxes with key lock EURO-LOCKS
-  The structure provides the possibility to fix the safe to wall by anchors
-  Standard color: grey (RAL 7040, RAL 7035)

Locking system:

K - Certified safe key lock STUV (Germany), A class

E - Certified safe electronic code lock M-LOCKS (The Netherlands), B class



GE.450.E.L

GE.600.K.L

Model	Висота зброї, мм (max)	Одиниць зброї	External dimensions, mm			Internal dimensions, mm			Weight, kg	Volume, litres	Modification*
			Height	Width	Depth	Height	Width	Depth			
GE.300	1335/1450	5	1512	300	350	1494	294	273	72	120	K/E, T
GE.420	1350	4	1412	420	370	1394	414	293	96	169	K/E, S, T
GE.450.L	1335/1450	5	1512	450	370	1494	444	293	114	194	K/E, S, T
GE.600.L	1335/1450	8	1512	600	370	1494	594	293	128	260	K/E, S, T
GE.650.L	1350	9	1412	650	370	1394	644	293	120	263	K/E, S, T
GE.750.L	1335/1450	10	1512	750	370	1494	744	293	148	326	K/E, S, T
GE.750/52.L	1335/1450	18	1512	750	520	1494	744	443	165	492	K/E, S, T

*K - key lock, E - electronic lock, T - inner lockable box, S - shelves

GUN SAFES AND CABINETS. SERIES G, GS, CL

- ☒ Metal thickness of the door - 6 mm (GS - 4 mm)
- ☒ Safe doors are equipped with strong three-sided bolt locking system with chromized bolts 25 mm by diameter and fixed bolts on the hinges side (GS - one-sided)
- ☒ LUX modification with inner decoration
- ☒ Removable shelves
- ☒ Standard color: grey (RAL 7016), GS.140.E - black (RAL 9005), GS.140.K - grey (RAL 7040)

Locking system:

K - Certified safe key lock STUV (Germany), A class

E - Certified safe electronic code lock M-LOCKS (The Netherlands), B class (GS.140.E - Electronic code lock QL, G.160.GOLD - Certified safe electronic code lock M-LOCKS (The Netherlands) or LaGard (USA)



G.160.GOLD



G.160.L.E

Model	Gun height, mm (max)	Items quantity	External dimensions, mm			Internal dimensions, mm			Weight, kg	Volume, litres	Modification*
			Height	Width	Depth	Height	Width	Depth			
GS.140	1350	3	1412	350	300	1397	347	238	42	140	K/E, S, T
G.450.LUX	1450	3	1512	450	350	1488	444	277	130	183	E, S, T
G.130	1250	2	1312	420	250	1288	414	177	87	94	K/E, S, T
G.160.L.E	1420	10	1512	560	540	1472	554	419	170	342	K, T
G.160.GOLD	1420	10	1512	560	540	1472	554	419	180	342	E, T
SAFES FOR GUN ROOMS											
GR.200.2.K.K	1980	20	2000	1000	600	1994	994	500	300	991	K, S
CERTIFIED BURGLAR-RESISTANT GUN SAFES PROTECTION CLASS II											
CL.II.150 GUN	1360	4	1506	600	600	1410	520	456	386	334	KE/KC, T

*K - key lock, E - electronic lock, C - mechanical code, T - inner lockable box, S - shelves



- ☒ Patented burglary-resistance construction „hook-up“
- ☒ Inner hinges
- ☒ Metal thickness of the door - 2,4 mm
- ☒ Removable magnetic rack for guns
Add on devices on the door: pockets for mags, ammo, ramrod holders, hooks.
- ☒ Locking system with chromized bolts
- ☒ The structure provides the possibility to fix the safe to wall or floor by anchors
- ☒ Standard color: grey (RAL 7016)

Locking system:

K - Safe key lock

E - Electronic code lock GRIFFON



GLT.125.K



GLST.130.K

Model	Gun height, мм (max)	Items quantity	External dimensions, mm			Internal dimensions, mm			Weight, kg	Volume, litres	Modification*
			Height	Width	Depth	Height	Width	Depth			
GL.110.K	1060	4	1112	260	260	1098	258	239	19	68	S, T
GL.125.K	1100	4	1252	260	260	1238	258	239	22	76	S, T
GLST.130.K	1260	4	1312	420	260	1298	418	239	35	130	S, T
GL.140.K	1360	4	1412	260	260	1398	258	239	23	86	S, T
GL.150.K	1460	4	1512	260	260	1498	258	239	24	92	S, T
GL.200.K	1260	3	1312	200	260	1298	198	239	18	61	S
GL.340.K	1360	5	1412	340	260	1398	338	239	28	113	S
GL.340.K	1360	5	1512	340	260	1498	338	239	31	121	T
GL.340/35.K	1360	5	1412	340	350	1398	338	329	31	156	S
GLST.470.K	1260	4	1312	470	350	1297	464	289	40	174	S, T
GL.470.K	1360	8	1512	470	260	1497	464	199	36	138	T
GL.470/35.K	1360	8	1512	470	350	1497	464	289	40	200	T
GL.650.K	1260	7	1312	650	350	1297	644	289	68	241	S, T
GL.700.K	1360	12	1512	700	350	1497	694	289	65	300	T
GL.700.E	1360	12	1512	700	350	1497	694	289	65	300	T

*K - key lock, E - electronic lock, T - inner lockable box, S - shelves

BUILT-IN SAFES. SERIES WB

- ☒ Metal thickness of the door – 10 mm, metal thickness of the case – 6 mm
- ☒ Special rebars for secure mounting to the wall
- ☒ Removable shelf
- ☒ Safe doors are equipped with strong bolt locking system with active chromized bolts 25 mm by diameter
- ☒ Standard color: grey (RAL 7016)

Locking system:

E – Certified safe electronic code lock M-LOCKS (The Netherlands), B class with additional function of delay opening

C – Certified safe code mechanical lock LaGard (USA) / M-LOCKS (The Netherlands)



WB.6040.E



Model	External dimensions, mm			Internal dimensions, mm			Weight, kg	Volume, litres	Modification*
	Height	Width	Depth	Height	Width	Depth			
WB.3425	342	362	250	330	330	143	42	16	E/C, S
WB.3436	342	362	360	330	330	253	46	28	E/C, S
WB.6040	600	480	410	588	440	302	106	78	E/C, S, T

*E – electronic lock, C – mechanical code, T – inner lockable box, S – shelves

BUILT-IN SAFES. SERIES FB

- ☒ Safes are designed for mount in the floor
- ☒ Metal thickness of the door – 10 mm
- ☒ Metal thickness of the case – 6 mm
- ☒ Chromized bolts
- ☒ Safes are equipped with additional protective panel
- ☒ Design with removable false panel

Locking system:

C – Certified safe code mechanical lock LaGard (USA) / M-LOCKS (The Netherlands)



FB.300

Model	External dimensions, mm			Internal dimensions, mm			Weight, kg	Volume, litres	Modification*
	Height	Width	Depth	Height	Width	Depth			
FB.300	240	240	309	200	200	210	23	8	C
FB.400	240	240	409	200	200	310	27	12	C

*C – mechanical code



Security level
S2 EN 14450

BURGLAR-RESISTANT BUILT-IN SAFES. SERIES W

- ☒ ECB-S certified safes for security level S2 according to EN 14450 in Europe
- ☒ Steel tempered plates for protection from drilling and knocking out locks and bolts
- ☒ Safe doors are equipped with strong three-sided bolt locking system with chromized bolts 25 mm by diameter (W.3219 and W.3228)
- ☒ Metal thickness of the door - 10 mm
- ☒ Special rebars for secure mounting to the wall
- ☒ Removable shelf
- ☒ Removable door for secure mounting
- ☒ Standard color: grey (RAL 7040, RAL 7035)

Locking system:

K - Certified safe key lock STUV (Germany), A class

E - Certified safe electronic code lock M-LOCKS (The Netherlands), B class

C - Certified safe code mechanical lock LaGard (USA) / M-LOCKS (The Netherlands)



W.2315.E



W.3219.K.C



Model	External dimensions, mm			Internal dimensions, mm			Weight, kg	Volume, litres	Modification*
	Height	Width	Depth	Height	Width	Depth			
W.2015	200	305	150	173	276	97	12	5	K/C, S
W.2315	230	350	150	203	321	92	16	6	E/C, S
W.2319	230	350	190	203	321	137	16	9	K/E/C/KC, S
W.3219	315	440	190	288	411	137	24	16	K/E/C/KC, S
W.3228	315	440	280	288	411	227	27	27	K/E/C/KC, S

*K - key lock, E - electronic lock, C - mechanical code, S - shelves

BUILT-IN SAFES. SERIES WL

- ☒ Metal thickness of the door – 8 mm
- ☒ Special rebars for secure mounting to the wall
- ☒ Safe doors are equipped with bolt system with 2 chromized bolts 25 mm by diameter (16 mm – safes with key lock)
- ☒ Removable shelf (exception WL.1716.K)
- ☒ Removable door for secure mounting
- ☒ Standard color: grey (RAL 7016), cream (RAL 9001)

Locking system:

K – Safe key lock

E – Electronic code lock GRIFFON



WL.1716.K



WL.2319.E



WL.5028.K.E

Model	External dimensions, mm			Internal dimensions, mm			Weight,	Volume,	Modification*
	Height	Width	Depth	Height	Width	Depth	kg	litres	
WL.1716	170	260	160	144	232	104	6	4	K
WL.2319	230	350	190	204	322	135	11	9	K/E, S
WL.3228	315	440	280	289	412	225	18	27	K/E/KE, S
WL.5028	500	400	280	474	372	225	27	40	E/KE, S

*K – key lock, E – electronic lock, S – shelves

- ☒ Safes are certified for security level S1 according to EN 14450
- ☒ Metal thickness of the door – 4 mm, metal thickness of the case – 3 and 4 mm
- ☒ Safe doors are equipped with strong bolt locking system with chromized bolts 25 mm by diameter
- ☒ The structure provides the possibility to fix the safe to floor or wall by anchors
- ☒ Inner hinges
- ☒ Inner pocket for documents on the door
- ☒ Inner lockable box with safe key lock in certain models
- ☒ Removable door
- ☒ Standard color: grey (RAL 7040, RAL 7035)

Locking system:

K – Certified safe key lock STUV (Germany), A class

E – Certified safe electronic code lock M-LOCKS (The Netherlands), B class with delay opening function



M.20.K



M.60.E



M.25.K

Model	External dimensions, mm			Internal dimensions, mm			Weight, kg	Volume, litres	Modification*
	Height	Width	Depth	Height	Width	Depth			
M.20	200	425	345	196	417	290	21	24	K/E, S
M.25	250	350	260	246	342	205	17	17	K/E, S
M.30	300	425	345	294	417	291	26	36	K/E, S
M.50	500	425	345	494	417	291	38	60	K/E, S
M.60	600	425	370	585	417	313	51	76	K/E, S, T
M.80	800	425	370	782	417	313	62	102	K/E, S, T
M.100	1000	500	400	982	492	343	85	166	K/E, S, T
M.120	1200	500	400	1185	492	345	97	201	K/E, S, T
M2.120	1200	500	400	590x590	492	345	100	201	K, S, T

*K – key lock, E – electronic lock, T – inner lockable box, S – shelves

FURNITURE AND OFFICE SAFES. SERIES R

- ☒ Metal thickness of the door – 5 mm
- ☒ Metal thickness of the case – 2 mm
- ☒ Safe doors are equipped with bolt locking system with chromized bolts 25 mm by diameter
- ☒ The structure provides the possibility to fix the safe to floor or wall by anchors
- ☒ Inner hinges
- ☒ Standard color: grey (RAL 7016)
- ☒ Removable shelf
- ☒ Inner lockable box in bigger models
- ☒ Configuration RD is equipped with a deposit slot/drum/drawer

Locking system:

K – Certified safe key lock STUV (Germany), A class

E – Electronic code lock GRIFFON

C – Certified safe code mechanical lock LaGard (USA) / M-LOCKS (The Netherlands)



R.26.E



R.30.K.E



RD.60.K.K

Model	External dimensions, mm			Internal dimensions, mm			Weight,	Volume,	Modification*
	Height	Width	Depth	Height	Width	Depth	kg	litres	
R.12	125	240	135	121	236	84	3,5	2,4	K
R.26	260	350	260	254	344	189	14	17	K/E/C, S
R.30	300	430	320	294	424	249	20	31	K/E/C/KE, S
R.48	480	380	370	474	374	309	28	55	K/E/KE, S, T
R.60	618	480	370	600	474	305	43	87	K/E/KE, S, T
R2.120	1183	480	400	575x575	474	335	100	155	KK/KE, S, T

Deposit safes

RD.26	260	350	260	256	346	190	14	17	K/E, S
RD.35	350	250	250	346	246	180	13	16	K
RD.48	480	380	370	476	376	304	28	55	K
RD.60	610	380	370	604	374	303	48	87	KK, S

*K – key lock, E – electronic lock, C – mechanical code, T – inner lockable box, S – shelves

- ☒ Metal thickness of the door and the case - 3 mm
- ☒ Safe doors are equipped with bolt locking system with chromized bolts 25 mm by diameter (16 mm - safes with key lock)
- ☒ The structure provides the possibility to fix the safe to floor or wall by anchors
- ☒ Removable shelf
- ☒ Inner lockable box in some configuration
- ☒ Removable door
- ☒ Standard color: grey (RAL 7016), cream (RAL 9001)

Locking system:

K - Safe key lock

E - Electronic code lock GRIFFON



S.20.K



S.25.E



S.50.E

Model	External dimensions, mm			Internal dimensions, mm			Weight,	Volume,	Modification*
	Height	Width	Depth	Height	Width	Depth	kg	litres	
S.20	200	380	260	194	374	216	14	16	K/E/KE, S
S.25	250	350	260	244	344	215	15	18	K/E, S
S.25.P	250	350	260	244	344	215	15	17	K/E, T
S.30	300	380	320	294	374	276	19	30	K/E, S
S.30	300	380	320	294	374	276	21	29	K/E, T
S.50	500	380	365	496	374	322	32	60	K/E, S, T
S.63	630	430	365	624	424	321	40	85	K/E, S, T

*K - key lock, E - electronic lock, T - inner lockable box, S - shelves

- ☒ Patented burglar-resistant construction of the door and case
- ☒ Metal thickness of the door and case - 2 mm
- ☒ Safe doors are equipped with bolt locking system with chromized bolts 25 mm by diameter
- ☒ Inner hinges
- ☒ The structure provides the possibility to fix the safe to floor or wall by anchors
- ☒ 2 users code in electronic code lock
- ☒ Standard color: the case - black (RAL 9005), the door - red (RAL 3000) or cream (RAL 9001)

Locking system:

E - Electronic code lock MySafe

KE - Electronic code lock MySafe and emergency safe key lock EURO-LOCKS (Poland)



MS.17.E RED



MS.17.K.E CREAM

Model	External dimensions, mm			Internal dimensions, mm			Weight,	Volume,	Modification*
	Height	Width	Depth	Height	Width	Depth	kg	litres	
MS.17 RED, CREAM	170	240	160	166	236	113	6	4	E
MS.17/23 RED, CREAM	170	260	230	166	256	184	6	8	KE

HOTEL SAFES

Safes are designed especially for clients for hotels. Safes are equipped with special hotel electronic code lock with display.



SH.20

Model	External dimensions, mm			Internal dimensions, mm			Weight,	Volume,	Modification*
	Height	Width	Depth	Height	Width	Depth	kg	litres	
SH.20	200	380	260	194	374	202	14	16	KE, S

*K - key lock, E - electronic lock, T - inner lockable box, S - shelves

FURNITURE AND OFFICE SAFES. SERIES L

-  Metal thickness of the door – 3 mm (L.16.K, L.17.K – 2 mm, LS.20.K – 1,5 mm)
-  Metal thickness of the case – 2 mm (L.16.K, L.17.K, LS.20.K – 1,5 mm)
-  Safe doors are equipped with 2 active chromized bolts 16 mm in diameter (excluded LS.20.K)
-  Inner hinges
-  Removable shelf
-  The structure provides the possibility to fix the safe to floor by anchors
-  Standard color: grey (RAL 7040)



L.26.K

Locking system: safe key lock (LS.20.K – safe key lock EURO-LOCKS (Poland))

Model	External dimensions, mm			Internal dimensions, mm			Weight, kg	Volume, litres	Modification*
	Height	Width	Depth	Height	Width	Depth			
LS.20	197	197	169	194	194	145	3	6	K
L.16	160	220	160	157	217	112	3	4	K
L.17	170	260	230	167	257	182	5	8	K
L.26	260	350	260	256	346	211	11	19	K, S
L.30	300	430	320	296	426	271	16	34	K, S
L.48	480	380	350	476	376	301	21	54	K, S
L.60	608	480	350	584	476	301	29	84	K, S
LC.60	608	480	350	584	476	301	34	84	K, S, T
L2.120	1183	480	400	575x575	476	351	66	194	K, T

BOOKKEEPER SAFES. SERIES B

-  Metal thickness – 1,2 mm
-  Patented burglar-resistant construction „hook-up“
-  Inner hinges
-  Inner lockable box
-  The structure provides the possibility to fix the safe to wall by anchors
-  Standard color: grey (RAL 7040)
-  Locking system: safe key lock



B.65.K

Model	External dimensions, mm			Internal dimensions, mm			Weight, kg	Volume, litres	Modification*
	Height	Width	Depth	Height	Width	Depth			
B.65	652	460	350	624	458	327	21	94	K, S, T
B.84	842	460	350	814	458	327	25	122	K, S, T
B.118	1184	460	350	1156	458	327	35	173	K, S, T
B2.118	1184	460	350	530x625	458	327	38	173	K, T
B.152	1526	460	350	1498	458	327	44	224	K, S, T
B3.152	1526	460	350	500x500x500	458	327	48	224	K, S, T

*K – key lock, T – inner lockable box, S – shelves

- ☒ Safes are grade II-III certified as per EN 1143-1
- ☒ Safes meet the requirements for protection level LFS 30 P for fire resistance according to EN 15659
- ☒ Burglar-resistant system of relockers
- ☒ Steel tempered plates for protection from drilling and knocking out locks and bolts
- ☒ Safe doors are equipped with strong three-sided bolt locking system, 5 active chromized bolts (CL II models) and 7 active chromized bolts (CL III models) 25 mm by diameter and 3 fixed bolts on the hinges side
- ☒ BASF thermal tape (Germany) along the perimeter of the door to protect from fire
- ☒ The protective layer of the case and door with fortification concrete – 40 mm thickness
- ☒ The structure provides the possibility to fix the safe to floor by anchors
- ☒ Configurations KE, KC with inner decoration
- ☒ Standard color: dark grey, cream
- ☒ Dimensions are specified without standing out parts: lock, handle, hinges
- ☒ Removable shelf



CL II.50.E CREAM



CL II.68.K.C

Locking system:

K – Certified safe key lock STUV (Germany) of A class (standart configuration), certified safe key lock STUV IVOX and VAROS of B class (optionally)

E – Certified safe electronic code lock M-LOCKS (The Netherlands) of B class with delay opening function

C – Certified safe code mechanical lock LaGard (USA) / M-LOCKS (The Netherlands)

Model	External dimensions, mm			Internal dimensions, mm			Weight kg	Volume litres	Modification*
	Height	Width	Depth	Height	Width	Depth			
CL.II.50	490	460	440	392	380	294	115	44	K/E/C/KE/KC, S
CL.II.60	606	500	500	510	420	356	145	76	K/E/C/KE/KC, S
CL.II.68	672	500	500	574	420	363	175	88	K/E/C/KE/KC, S, T
CL.II.90	922	500	500	824	420	363	220	126	K/E/C/KE/KC, S, T
CL.II.120	1182	500	500	1084	420	363	260	165	K/E/C/KE/KC, S, T
CL.II.150	1506	600	600	1410	520	456	386	334	K/E/C/KE/KC, S, T
CL.II.150 GUN	1506	600	600	1410	520	456	386	334	KE/KC, S, T
CL.III.50	490	460	440	392	380	294	145	44	K/E/C/KE/KC, S
CL.III.60	606	500	500	510	420	356	185	76	K/E/C/KE/KC, S
CL.III.68	672	500	500	574	420	363	210	88	K/E/C/KE/KC, S, T
CL.III.90	922	500	500	824	420	363	285	125	KE/KC, S, T
CL.III.120	1182	500	500	1084	420	363	360	165	KE/KC, S, T
CL.III.150	1506	600	600	1410	520	456	560	334	KE/KC, S, T

*K – key lock, E – electronic lock, C – mechanical code, T – inner lockable box, S – shelves

- ☒ Safes are grade V-VIII certified as per EN 1143-1
- ☒ Burglar-resistant system of relockers
- ☒ Steel tempered plates for protection from drilling and knocking out locks and bolts
- ☒ Safe doors are equipped with strong three-sided bolt locking system, active chromized bolts 32 mm by diameter and fixed bolts on the hinges side
- ☒ The protective layer of the case and door with heavy-duty concrete – 100 mm thickness and in safes grade VIII – heavy-duty concrete DENSIT FLEXBINDER (Denmark)
- ☒ The structure provides the possibility to fix the safe to floor by anchors
- ☒ Standard color: dark grey
- ☒ Removable shelf
- ☒ Dimensions are specified without standing out parts: lock, handle, hinges
- ☒ Dismountable construction

Locking system:

KK -Two certified safe key lock STUV (Germany)



CL V.150.K.K

BANK BURGLAR-RESISTANT SAFES. GRADE V, VII, VIII

Model	External dimensions, mm			Internal dimensions, mm			Weight,	Volume,	Modification*
	Height	Width	Depth	Height	Width	Depth	kg	litres	
CL V.70.K.K	700	720	770	500	520	490	715	129	KK, S
CL V.100.K.K	1000	720	770	782	520	490	780	200	KK, S
CL V.130.K.K	1300	720	770	1082	520	490	965	275	KK, S
CL V.150.K.K	1500	720	770	1282	520	490	1110	326	KK, S
CL V.180.K.K	1900	960	825	1700	760	550	1750	711	KK, S
CL V.180.2.K.K	1900	1760	940	1700	1560	665	3240	1764	KK, S

Model	External dimensions, mm			Internal dimensions, mm			Weight,	Volume,	Modification*
	Height	Width	Depth	Height	Width	Depth	kg	litres	
CL VII.150.K.K	1600	1000	940	1400	800	665	1848	745	KK, S
CL VII.180.K.K	1900	1000	940	1700	800	665	2330	904	KK, S
CL VII.180.2.K.K	1900	1760	940	1700	1560	665	3440	1764	KK, S

Model	External dimensions, mm			Internal dimensions, mm			Weight,	Volume,	Modification*
	Height	Width	Depth	Height	Width	Depth	kg	litres	
CL VIII.150.K.K	1600	1000	940	1400	800	665	2106	745	KK, S
CL VIII.180.K.K	1900	1000	940	1700	800	665	2460	904	KK, S
CL VIII.180.2.K.K	1900	1760	940	1700	1560	665	3646	1764	KK, S

- ☒ Safes are grade II-V certified as per EN 1143-1
- ☒ Burglar-resistant system of relockers
- ☒ Steel tempered plates for protection from drilling and knocking out locks and bolts
- ☒ Safe doors are equipped with strong three-sided bolt locking system, active chromized bolts 25-32 mm by diameter and fixed bolts on the hinges side
- ☒ The protective layer of the case and door with heavy-duty concrete – 40-100 mm thickness
- ☒ The structure provides the possibility to fix the safe to floor by anchors
- ☒ Standard color: dark grey
- ☒ Removable shelf
- ☒ Dimensions are specified without standing out parts: lock, handle, hinges
- ☒ Dismountable construction

Locking system:

KK -Two certified safe key lock STUV (Germany)



CL V.180.2.DS.K.K

Model	External dimensions, mm			Internal dimensions, mm			Weight,	Volume,	Modification*
	Height	Width	Depth	Height	Width	Depth	kg	litres	
CL II.180.DS.K.K	1818	785	606	1720	705	465	467	564	KK
CL II.180.2.DS.K.K	1818	1490	606	1720	1410	465	775	1128	KK
CL V.180.DS.K.K	1900	885	775	1700	685	480	1565	559	KK
CL V.180.2.DS.K.K	1900	1610	775	1700	1410	480	2455	1151	KK

Amount of cash and/or other valuables for storage in safes-vaults (except ATM-safe) used as storage, depending on resistance grade according to EN 1143-1.

According to the Appendix to the Rules of Protection organisation of bank premises in Ukraine (in edition the decision of the National Bank of Ukraine October 4, 2014 No.390)

Resistance grade according to EN 1143-1	Amount of cash and/or other valuables to store (in number of minimum wages)
Grade II	2000
Grade III	4000
Grade IV	6000
Grade V	10000
Grade VI	20000
Grade VII	50000
Grade VIII	100000
Grade IX	150000
Grade X	200000
Grade XI	400000
Grade XII	600000
Grade XIII	more than 600000


Bank vaults are designed and certified to meet all the necessary requirements of EN 1143-1 and can be used in banks and financial establishments.




- Bank vaults are designed for secure storage valuable things with authorized access. Bank vault consists of two main elements: shell and door block. There are three types of shell: monolithic, modular, combined.
- Construction material: special designed in laboratories Paritet-K extra high strength reinforced fortification concrete and extra high strength fibre-reinforced concrete DENSIT FLEXBINDER (Denmark). The company Paritet-K has the exclusive right to the use of concrete mixtures and technologies DENSIT for the manufacturing safes and secure storage units.
- The advantages of designs storage with heavy-duty concrete, which provides high burglar resistance with a smaller thickness of the protective layer:

 - Increasing of the useful internal volume of the vault, or decrease the size of the vault
 - Reduction weight of the vault, that allows to reduce the load on the building foundations and slabs which the vault is installed in
 - Ability to upgrade already-built storage by starting internal or external amplification of the thin panels of high class.

Strengthening the shell of the vault from the outside

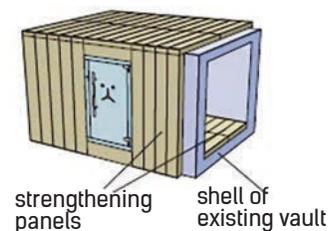


Strengthening the shell of the vault from the inside

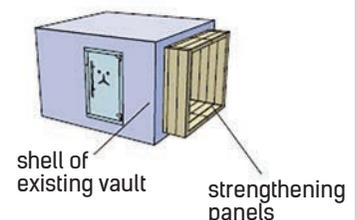


SAFE DEPOSIT LOCKERS

- ☒ Safe deposit lockers are designed for storage valuables and documents of bank clients
- ☒ Stalls are installed in certified bank vaults
- ☒ Safe deposit lockers are equipped individual boxes. They are ensuring confidential secure storage
- ☒ SDL can be equipped with 5 - 24 lockable compartments. Height of lockers from 50 to 500 mm (with a step 25 mm)
- ☒ Optional internal boxes
- ☒ Individual numbers of lockers
- ☒ Lockers equipped with special certified safe locks STUV (Germany) or deposit locks EUROLOCKS (Poland)

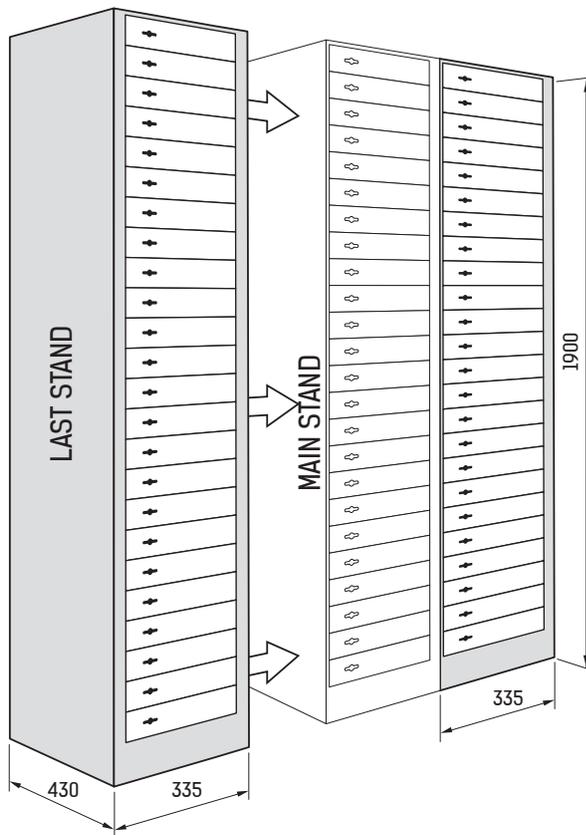

LUX safe deposit locker

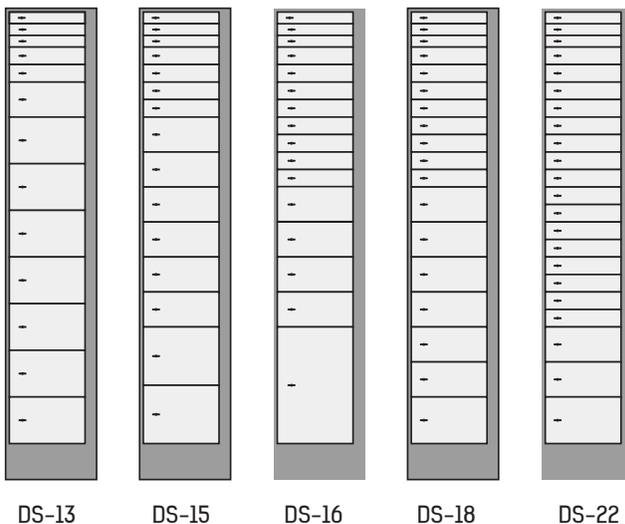

Paritet-K produces high quality deposit stands. It also produces custom-made items for its clients.

GUN SAFE WITH ARMORED GLASS



GE.700.E

POLICE SAFE CABINETS



PC.195

AUTOMOBILE SAFES




A.15.K

JEWELRY CERTIFIED SAFES, GRADE II-III



CL.II.50.E Jewelry

Paritet-K produces custom-made configuraton items for its clients.

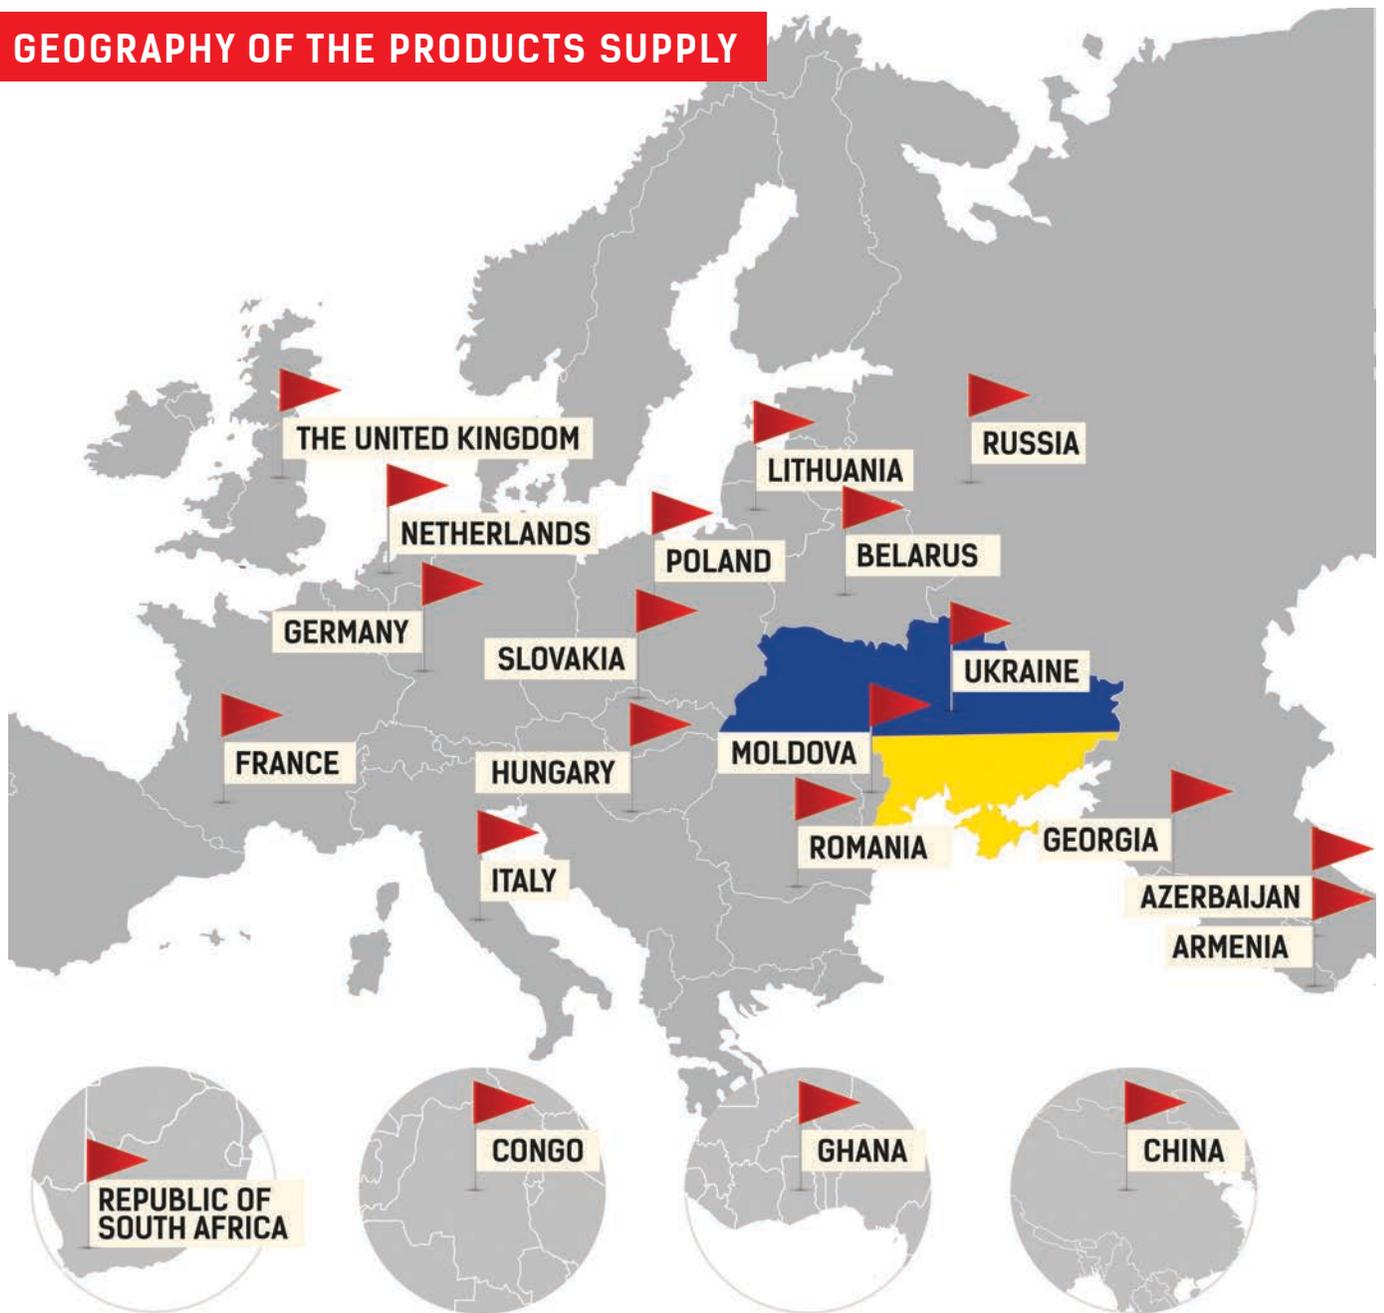

26 years

we produce safes and banking equipment

-  The leader in building bank vaults II-XIII grade – **100 banks** trust us
-  We export safes to **20 countries** of the world
-  Model range is more than **400 products**
-  European Certificates ECB-S
-  **24** Ukrainian **certificates** EN
-  Paritet-K is the first Ukrainian producer who certified safes in Europe
-  Warranty and full service
-  Quality Management System ISO 9001
-  Member of ESSA

Paritet-K was founded in 1992 and specializes in production of safes and secure storage means for valuables. Today the company Paritet-K is a leader of Ukrainian market in production of safes secure storage means. The products are exported to markets in Europe and Asia.



The product quality meets the highest international standards ISO 9001.



The company Paritet-K is the only one in Ukraine among manufacturers of safes and secure storage meange who is a member of the European Security Assosiation ESSA.



The same products are produced and sell for the market of Europe and Ukraine.



Products passed certification in Europe. Certification is made according to European standards EN 1143-1, EN 14450, EN 15659.



Production of safes is performed on modern, hi-tech equipment.



Paritet-K has unique, patented developments in the production of safes and the vaults using its own design bureau.



Paritet-K company reserves the right to change the modification, configuration, products color and other features that are listed in the catalog. The catalog is designed with purpose to advertise and inform buyers.

