ATTALINK **3A** ATTALINK **6A**

2 models to meet your needs. Applies ties up to 60 mm in diameter. Applies elastic ties.

2 types of ties : degradable or long-lasting depending on use.

- Degradable ties made of natural rubber and cotton:
 - The standard tie is recommended for most jobs. In agricultural applications, it falls off by itself when the plant no longer requires support and decays naturally in the soil.
- The thin tie is recommended for highly fragile applications (young herbaceous shoots...)
- •• The natural rubber tie is girdled with synthetic fabric:
 - The long-lasting version is more UVresistant. It also provides a tighter grip.

Tie colour choices: off-white, green, black... To ease marking and blend into the environment...

Technical features

۲

ATTALINK	3A	ATTALINK	6A
Max. binding Ø 30 mm		Max. binding Ø 60 mm	
Span: 44 mm		Span: 82 mm	
Loaded weight: approx. 520 g		Loaded weight: approx. 630 g	
Tie breaking strain: up to 3 kg			
Type of tie: elastic tie crimped with a small metal ring			
Tool is delivered ready-to-go			

ATTALINK

An automatic binding system to meet your professional needs.

Farming

Industry

VIGOUROUX has been innovating and designing binding systems to boost your performance for over 70 years!

PRODUCT SUPPORT

After-Sales Service + 33 (0)5 63 94 67 03

VIGOUROUX - Dalmayrac - 82 110 Lauzerte - France Tél. +33 (0)5 63 94 67 03 - Fax +33 (0)5 63 94 61 50 www.vigouroux-web.com - e.mail: mv@vigouroux-web.com

ATTALINK

Tying machines



ATTALINK

Professional performance

Robust

۲

Stainless steel design makes the ATTALINK tying machine extremely resistant to rough handling and weather.


Impressive operating range

ATTALINK can apply 1,000 ties without reloading.

Light and ergonomic

Lightweight and easy to handle, ATTALINK provides optimum working comfort.



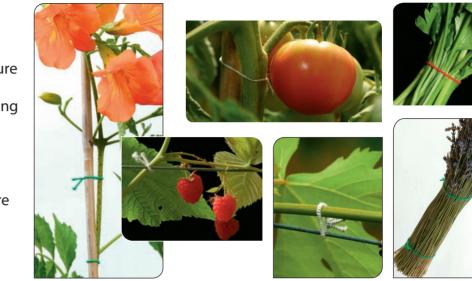

ATTALINK, a world of applications

- Automotive equipment Electrical equipment
- Household items
- Garden equipment
- Office equipment





